AIR-LIFT




The homogenisation Air-Lift aerates water reliably and efficiently.

Benefits:

- Feed the oysters by creating water movement with low energy consumption.
- **Homogenise** the water column and buffer the environment.
- **Avoid** excessively high oxygen concentrations.

Homogenisation

Flow rate of 80 m3/h for 0.2 kW

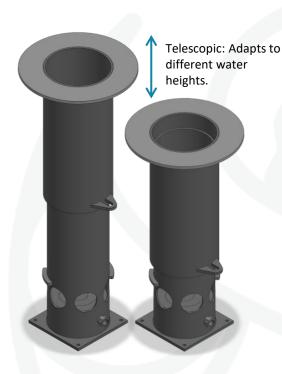

Different types of base depending on the depth and type of soil.



Homogenisation Air-Lifts

Recirculation Air-Lifts

















AIR-LIFT



The recirculation Air-Lift system moves water reliably and efficiently.

Benefits:


- Create **low-energy water circulation** to recharge the water with phytoplankton.
- Limit dead zones.
- **Different diameters** available for water heights from 80 to 250 cm.

Recirculation


Flow rate of 85 m3/h for 0.5 kW



This Air-Lift is attached to a pipe between two pond and creates a current.



Example of an Air-Lifts installation

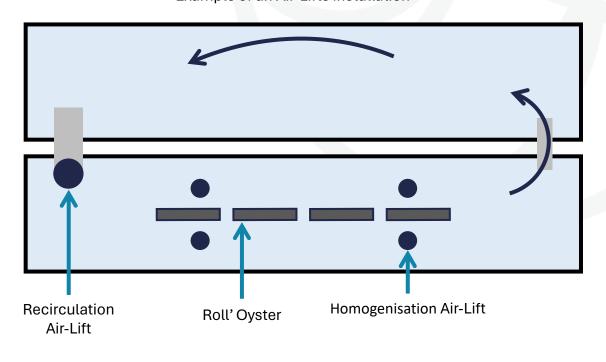

Watch the Air-Lift video:





contact@seaducer.fr



www.seaducer.fr





